

PP-02 PHASE ROTATION / PHASE FAIL PROTECTION RELAY




Features:


- Ideal for protecting 3 phase equipment from damage due to phase Reversal or Phase Failure NC terminal for alarm indication LED lamp for OK status.
- Compact and slim size.
- Auto reset.
- Suits A/C compressors.
- Easy installation.

SPECIFICATIONS

Power Consumption	0.9 w/phase
Input Voltage	380, 415 VAC
Frequency	50/60 Hz
Accuracy	+/- 0.5% of normal voltage
Phase Sequence	RST
Contact Rating	10A at 250 VAC
Relay Reset	Automatic
Operating Temperature	-10°C to +55°C
Storage Temperature	-10°C to +70°C
Ambient Humidity Max.	85% RH
Protection Class	IP 20
Housing	ABS UL 94 V-0
Mounting	Screw to any surface

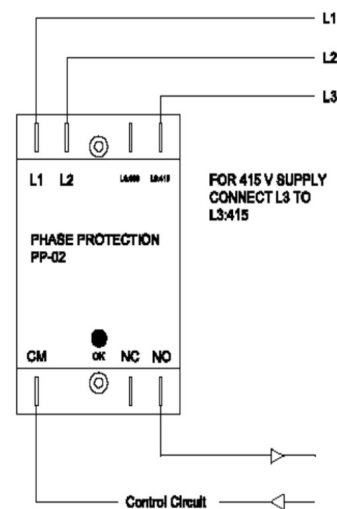

WIRING DIAGRAM PP-02 (380/415 VAC 50/60 HZ)

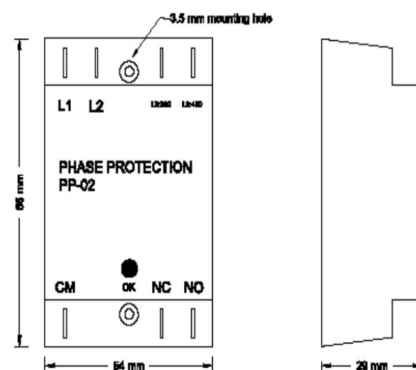

DIMENSIONS